



Overview

The SE-350-WT-CH 2-slot charger allows simultaneous charging of 2 Sense Microphones or bodypack lavalieres.


Contents

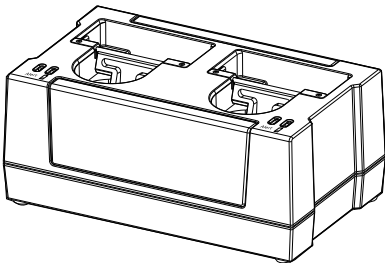

SE-350-WT-CH




Rechargeable Batteries
4 included

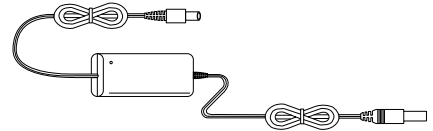

Power Adaptor
12 VDC @ 2.5A

Features

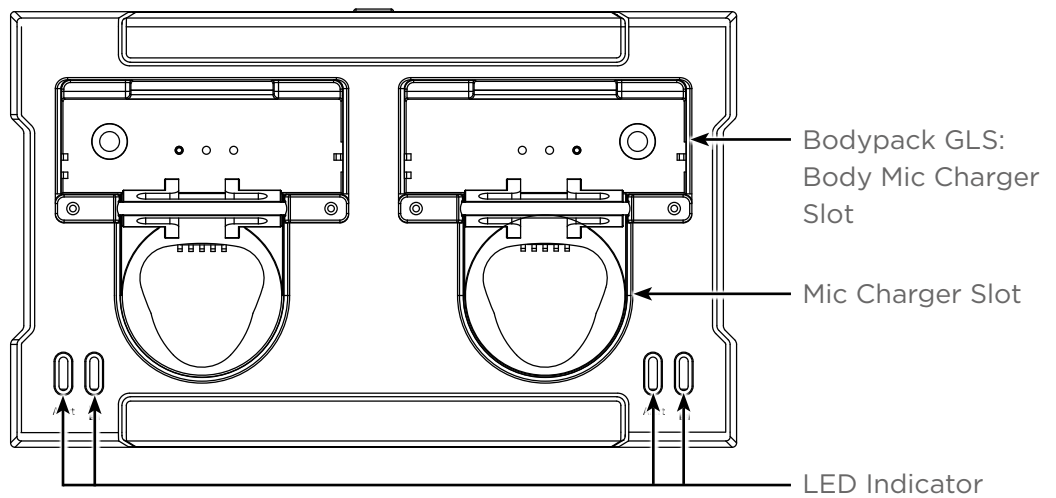


Charging the Batteries

Plug the Microphone or bodypack lavalier into the charger slot.

The charging indicator flashes green while charging, and change to solid green when fully charged.

Notes:

- The charging indicator illuminates once AC power is connected.
- Ensure the transmitters and charging points are in contact as shown in the figure.
- Each slot can only charge one item at a time.

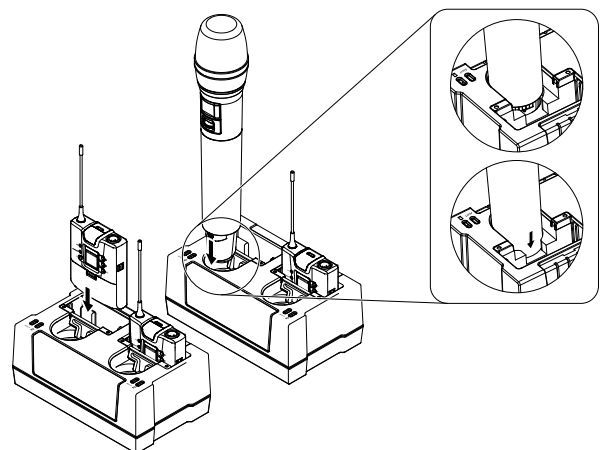

Specifications

SE-350-WT-CH-2	
Input	AC 100 - 240V, 0.4A max
Output	DC 12V, 1A
Charging Time	5 hours (2000mAh NiMH rechargeable battery)
LED Indicator	
Fully Charged/Standby	Solid Green
Charging	Flashing Green
Fault	Red light flashes 1 time : Battery overheated
	Red light flashes 2 times : Battery voltage too high
	Red light flashes 4 times : Battery short circuit
	Red light flashes 8 times : Battery voltage too low

Warranty

1-Year Limited Warranty

Find details of this product's 1-Year Limited Warranty at snapav.com/warranty, or request a paper copy from Customer Service at (866) 424-4489. Find other legal resources, such as regulatory notices and patent information, at snapav.com/legal.



www.snapav.com | Support: 866.838.5052

Copyright ©2021, Wirepath Home Systems, LLC. All rights reserved.