# GOLD OMNI SE

## IN-CEILING, IN-WALL SPECIAL EDITION

## GOLD OMNI SE

### IN-CEILING, IN-WALL SPECIAL EDITION

Triad's Gold Omni Special Edition speakers deliver superior full-range sound with their calculated, minimal design in virtually any setting.

Triad offers two configurations of the Gold Omni SE for multiple installation options, featuring studio-grade drivers and crossovers for detailed, extended bass; clean, harmonic treble; and substantial output. Ceiling-mounted speakers project sound directly to the listener through unique angled baffles, and fully-engineered sealed, braced enclosures ensure sound isolation. The Gold Omni SE can be used for two-channel systems in smaller rooms, upgraded distributed audio, or as part of an intimate home theater system with a sat and sub partnership. Use as a high-resolution, standalone pair of speakers, or create a full-range surround sound experience by pairing with Triad LCRs and subs.

Bring an audiophile experience to your bedroom, den, or family room with impressive musical results and low visual impact delivered by the Triad Gold Omni SE.

## FEATURES

- Compact, flat design
- AcoustiPerf frameless metal grill
- Fully engineered, premium MDF enclosure
- Acoustic suspension
- Custom paint matching available
- Two-way design
- Braced enclosure keeps sound from bleeding into adjacent rooms

### IN-CEILING

- 45 degree baffle angle

TRIAD®

# GOLD OMNI SE IN-CEILING, IN-WALL SPECIAL EDITION

## SPECIFICATIONS

| MATERIALS | IN-CEILING/8 | IN-WALL/4 |
|---|---|---|
| Tweeter size | (1) 1″ (25 mm) | (1) 1″ (25 mm) |
| Tweeter type | Fabric dome | Fabric dome |
| Woofer size | (1) 6 1/2″ (17 cm) | (1) 6 1/2″ (17 cm) |
| Woofer type | Paper/fiber blend | Paper/fiber blend |

| PERFORMANCE | IN-CEILING/8 | IN-WALL/4 |
|---|---|---|
| Recommended amplifier power | 25 - 125W | 25 - 125W |
| Impedance | 8 ohms | 8 ohms |
| Sensitivity (dB @ 2.83V, 1 m) | 86 dB | 86 dB |
| Frequency response (+/- 3 dB) | 78 Hz - 20 kHz | 78 Hz - 20 kHz |

| DIMENSIONS | IN-CEILING/8 | IN-WALL/4 |
|---|---|---|
| Cabinet specifications (L × W × D) | 13 1/2 × 13 1/2 × 8″ (34.3 × 34.3 × 20.3 cm) | 16 3/8 × 10 3/4 × 3 15/16″ (41.5 × 27.3 × 9.9 cm) |
| Hole cut out (L × W) | 13 5/8 × 13 5/8″ (34.6 × 34.6 cm) | 16 1/2 × 10 7/8″ (41.9 × 27.6 cm) |
| Frameless grill dimensions (L × W) | 14 13/16 × 14 13/16″ (37.6 × 37.6 cm) | 17 9/16 × 12 1/16″ (44.6 × 30.6 cm) |
| NCB size | G | F |
| Product weight (ea.) | 17 lb (7.7 kg) | 13 lb (5.9 kg) |
| Shipping weight (ea.) | 20 lb (9.1 kg) | 15 lb (6.8 kg) |

| PRODUCT NUMBERS | IN-CEILING/8 | IN-WALL/4 |
|---|---|---|
| Wall mounting | - | 46402-1000-2 |
| Right side mounting | 56602-1100-2 | - |
| Left side mounting | 56602-1200-2 | - |

Product page

triadspkrs.co/gldomni-se

## DIMENSIONS

### IN-CEILING/8




13 1/2″ [34.3 cm] (Front)

8″ [20.3 cm] (Side)

### IN-WALL/4

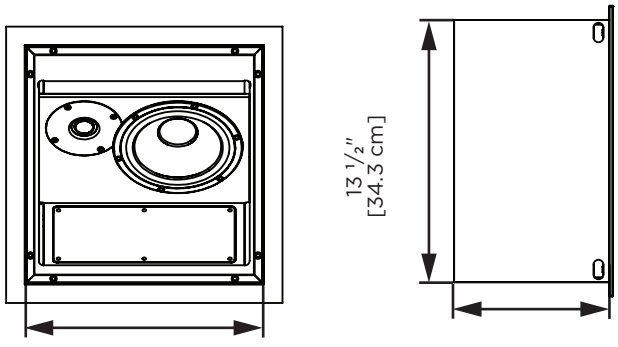


3 15/16″ [9.9 cm] (Side)

10 3/4″ [27.3 cm] (Front)

Copyright ©2018, Control4 Corporation. All rights reserved. Control4, Triad, and the Triad logo are registered trademarks or trademarks of Control4 Corporation or its subsidiaries in the United States and/or other countries. All other names and brands may be claimed as the property of their respective owners. All specifications subject to change without notice.

201-46402-A
2018-04-11 LW

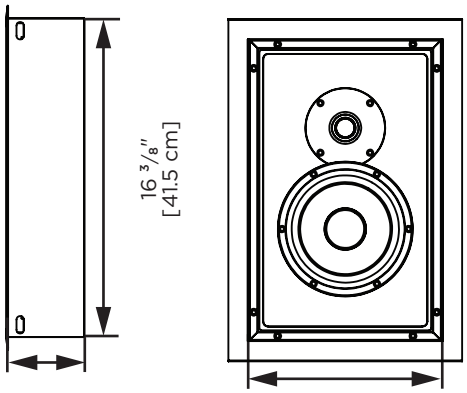TRIAD®

TRIADAUDIO.COM | PORTLAND, OR