

CONTROL4® VIBRANT

ACCENT FIXED-COLOR OUTDOOR LINEAR LIGHT



CONTROL4 VIBRANT ACCENT FIXED-COLOR OUTDOOR LINEAR LIGHT


C4-LAO-F30-49

Achieve seamless lines of direct view lighting for your customers with Accent Outdoor Linear Lighting. This durable solution is UV, flame, and saltwater resistant for long life and integration flexibility. Plus, it's easy to install and versatile enough for any interior or exterior application with multiple power feed options and infield customization.


- Static white vertical (top bend) LED
- Available in 3000K
- 90+ color rendering index
- Lumen output performance up to 167 Lumens per foot
- Measures 10 mm wide and is cuttable every 1.96" (50 mm) with 55.7ft max run length
- Dimmable (5-100%) with all Control4 forward phase and adaptive phase dimmers: Essential, Wireless, and Centralized
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

CONTROL4® ACCENT FIXED-COLOR OUTDOOR LINEAR LIGHT

QUICK LOOK

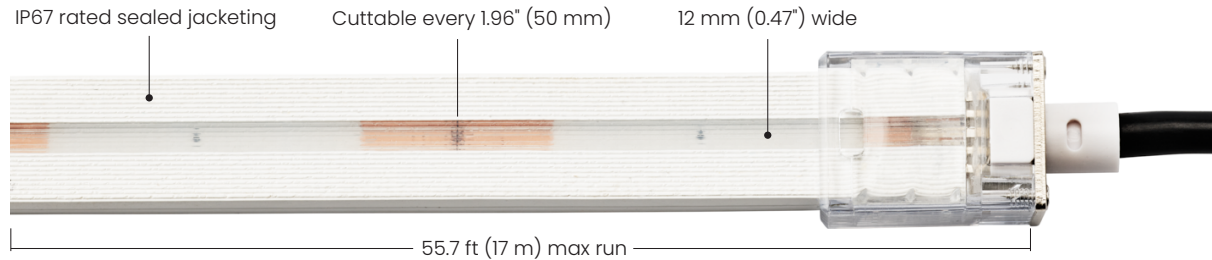

QUICK CONNECTION

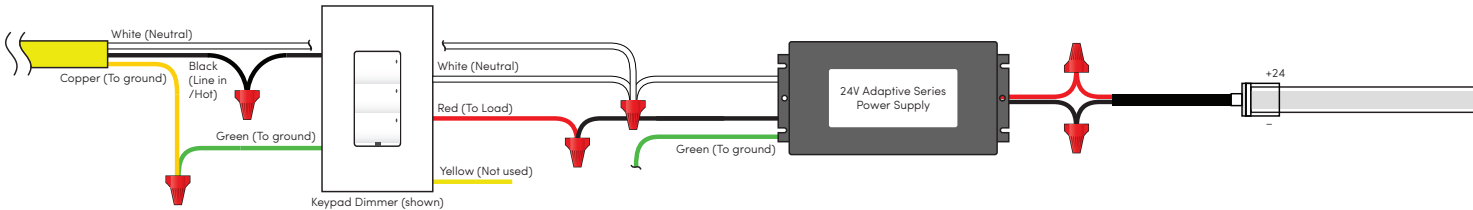

SPECIFICATIONS

Model number	C4-LPO-F30-50
Color temperature	2700K, 3000K, or 4000K
Voltage	24V DC
Wattage	3.05W / ft
Lumens	Up to 167 Lm / ft
Maximum run	55.7 ft (17 m)
Tape size	0.63 x 0.59" (16 x 15 mm)
Cutting increment	1.96" (50 mm)
Reel length	16.4 ft (5 m)
Dimming	5-100% (ELV TRIAC)
Control method	24V DC power supply, dimmer switch

Environmental	
Operational temperature	-25° C to 45° C (-13° F to 113° F)
IP Rating	IP67 - Jacketed
Humidity	5% to 95% non-condensing
Storage	-20° C to 60° C (-4° F to 140° F)

Included accessories	
	End cap (3)
	Left entry, 2-pin connector (1)
	Right entry, 2-pin connector (1)


Available accessories	
C4-LCO1-2WL-S	2-pin jumper, 6" (152.4 mm)
C4-LCO1-2WL-L	2-pin jumper, 24" (609.6 mm)

MORE INFO ON VIBRANT LIGHTING



ctrl4.co/vibrant

INSTALLATION GUIDE



ctrl4.co/vibrant-outdoorrgbw-ig