

CONTROL4® VIBRANT

ACCENT RGBW OUTDOOR LINEAR LIGHT



CONTROL4 VIBRANT ACCENT RGBW OUTDOOR LINEAR LIGHT


C4-LAO-RGBW-36

Achieve seamless lines of direct view lighting for your customers with Accent Outdoor Linear Lighting. This durable solution is UV, flame, and saltwater resistant for long life and integration flexibility. Plus, it's easy to install and versatile enough for any interior or exterior application with multiple power feed options and infield customization.

- RGBW vertical (top bend) LED
- Lumen output performance up to 134 Lumens per foot
- Consumes up to 4.6W per foot
- Measures 16 mm wide and is cuttable every 2.46" (62.5 mm) with 18ft max run
- Quick install field connections: Front, Side, and Bottom feeds
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Control for color change and dimming via DMX/DALI (requires Creative Lighting Gateway) or Zigbee (requires Axxess DCM module)
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

CONTROL4® ACCENT RGBW OUTDOOR LINEAR LIGHT

QUICK CONNECTION

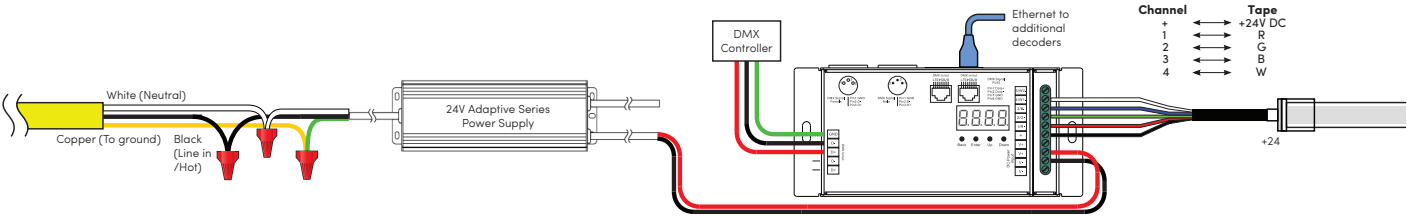

SPECIFICATIONS

Model number	C4-LPO-RGBW-36
Color temperature	RGBW 3000K
Voltage	24V DC
Wattage	4.57W / ft
Lumens	Up to 134 Lm / ft
Maximum run	16.4 ft (5 m)
Tape size	0.63 x 0.59" (16 x 15 mm)
Cutting increment	2.46" (62.5 mm)
Reel length	16.4 ft (5 m)
Dimming	5-100% (DMX controls)
Control method	24V DC power supply, DMX decoder

Environmental	
Operational temperature	-25° C to 45° C (-13° F to 113° F)
IP Rating	IP67 - Jacketed
Humidity	5% to 95% non-condensing
Storage	-20° C to 60° C (-4° F to 140° F)

Included accessories	
	End cap (3)
	Left entry, 5-pin connector (1)
	Right entry, 5-pin connector (1)


Available accessories	
C4-LCO1-5WL-S	5-pin jumper, 6" (152.4 mm)
C4-LCO1-5WL-L	5-pin jumper, 24" (609.6 mm)

MORE INFO ON VIBRANT LIGHTING



ctrl4.co/vibrant

INSTALLATION GUIDE



ctrl4.co/vibrant-outdoorrgbw-ig