# **CONTROL4® VIBRANT**

# FIXED COLOR EXTRUSION AND LENS



# CONTROL4 VIBRANT FIXED COLOR IN-WALL EXTRUSION AND LENS (3-PACK) - 6.58FT (2M)

### C4-LEEL3-IW-F-6F

Use this extrusion for in-wall accent lighting to set the mood, change the ambiance, and provide general lighting. With its large flanges, this extrusion creates fewer seams, efficient installations, and is perfect for mud-in applications. Create a linear effect in the wall with fixed color, warm dimming, fully tunable, RGBW, or RGBTW linear lighting.


Note: To prevent spotting and provide a seamless line of light, it is recommended to install 10 mm LED tape on the side walls of the channel instead of the floor.

- LED tape light should be installed on side walls of the extrusion
- Designed for 1/2" drywall mud-in installation
- Frosted lens protects the light source while evenly diffusing light
- · Lightweight anodized aluminum extrusion provides excellent heat dissipation
- Field cuttable extrusion and lens
- End caps available for a tailored look
- Compatible with 10-12 mm wide tape light (all indoor SKUs)
- Dimensions (H x W): 7/8" (22 mm) by 4-27/32" (12.825 mm) with an internal channel floor width of 1-1/2" (38 mm) and side wall height of 25/64" (10 mm)



# CONTROL4® FIXED COLOR IN-WALL EXTRUSION AND LENS

# **DIMENSIONS**

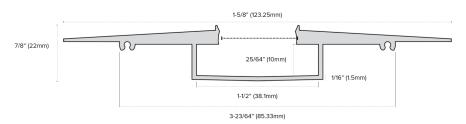



# **SPECIFICATIONS**

| Model number                 | C4-LEEL3-IW-F-6F                                |  |
|------------------------------|---|--|
| Extrusion length 6.58' (2 m) |   |  |
| Maximum tape light width     | Side walls: 0.39" (10 mm), Floor: 0.47" (12 mm) |  |
| Finish                       | Anodized aluminum                               |  |
| Mounting method              | #8 screws                                       |  |

#### Compatible with these models:

| Accent warm-dimming                       |  |
|---|--|
| Performance warm-dimming                  |  |
| Performance fixed color, 2700K            |  |
| Performance fixed color, 3000K            |  |
| Performance fixed color, 4000K            |  |
| Performance fixed color diffusing, 2700K  |  |
| Performance fixed color diffusing, 3000K  |  |
| Performance fixed color diffusing, 4000K  |  |
| Performance fully tunable                 |  |
| Performance RGBW (floor of channel only)  |  |
| Performance RGBTW (floor of channel only) |  |
|   |  |

|  | accessories |
|--|-------------|
|  |             |
|  |             |
|  |             |

C4-LEL-IW-F-6F | Lens

#### Available accessories

C4-LEE-IW-F-END | 1 power feed end cap, 1 end cap





