

CONTROL4® VIBRANT

PERFORMANCE FIXED COLOR LINEAR LIGHT



CONTROL4 VIBRANT PERFORMANCE FIXED COLOR LINEAR LIGHT

C4-LP-F27-16
C4-LP-F27-98

C4-LP-F30-16
C4-LP-F30-98


C4-LP-F40-16
C4-LP-F40-98

Envelop your customers with a captivating lighting experience using our most popular tape light option, Vibrant Performance Linear Lighting. The Performance line is perfect for most applications due to its excellent lumen output with a slightly longer max run. With anywhere from 310 - 385 Lumens per foot and a max run of up to 27 feet, Vibrant Performance provides a perfect blend of lumens, light quality, and color temperature options for improving your customer's living experience with calm and carefree tones.


- Available in 2700K, 3000K, and 4000K
- Up to 90+ color rendering index
- Lumen output ranging from 310-385; 27: 310 lumens, 30: 335 lumens, 40: 385 lumens
- Measures 10 mm wide and is cuttable every 3.94" (100 mm) with 27 ft max run
- Easy installation featuring 3M VHB adhesive backing
- IP54 rating
- Dimmable (5-100%) with all Control4 forward-phase and adaptive-phase dimmers: Essential, Wireless, and Centralized
- Suitable for use in closets when used in an enclosed extrusion based on NFPA 70, NEC section 410.16 (A) (3) and 410.16 (C)(5)
- cULus Listed for indoor dry/damp
- JA8 Compliant
- 50,000 hours rated life

CONTROL4® VIBRANT PERFORMANCE FIXED COLOR

QUICK LOOK

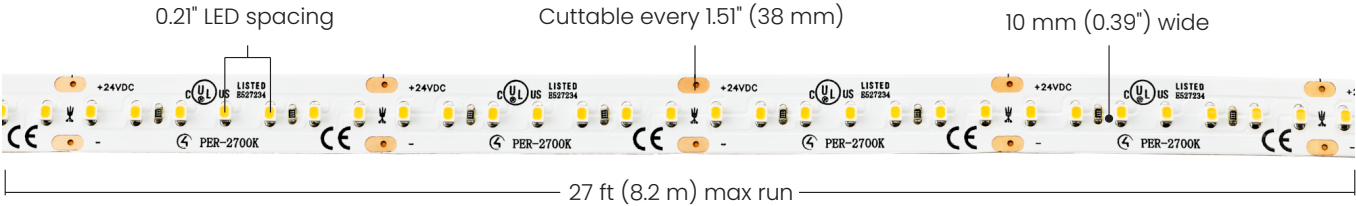

QUICK CONNECTION

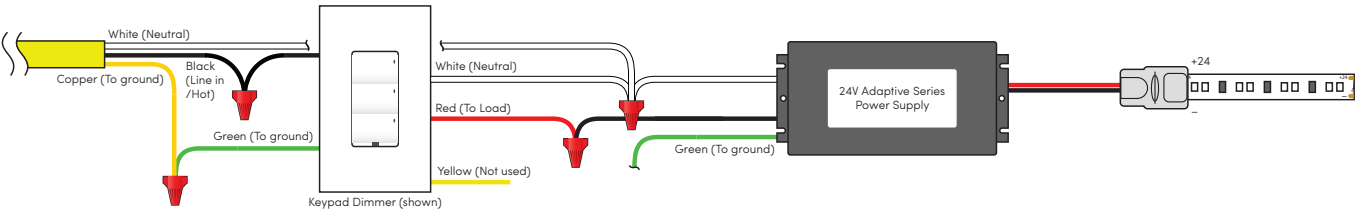

SPECIFICATIONS


Model number	C4-LP-F27-16 (Performance Fixed Color 2700K, 16 ft reel) C4-LP-F27-98 (Performance Fixed Color 2700K, 98 ft reel) C4-LP-F30-16 (Performance Fixed Color 3000K, 16 ft reel) C4-LP-F30-98 (Performance Fixed Color 3000K, 98 ft reel) C4-LP-F40-16 (Performance Fixed Color 4000K, 16 ft reel) C4-LP-F40-98 (Performance Fixed Color 4000K, 98 ft reel)	
Power requirements	24V DC	
Wattage	3.65W / ft (0.3 m)	
Lumens	C4-LP-F27 - 310 Lm / ft (0.3 m) C4-LP-F30 - 335 Lm / ft (0.3 m) C4-LP-F40 - 385 Lm / ft (0.3 m)	
Max run	27 ft (8.2 m)	
Color temperature	C4-LP-F27 - 2700K C4-LP-F30 - 3000K C4-LP-F40 - 4000K	
CRI	96+	
Beam angle	120°	
Tape size	0.39" (10 mm) W × 0.06" (1.65 mm) H	
Cutting increment	3.94" (100 mm)	
Control method	24V power supply with a dimmer or switch	
Dimming compatibility	TRIAC / ELV (5 - 100%)	
Operational temperature	0° C to 40° C (32° F to 104° F)	
Humidity	5% to 95% non-condensing	
Storage	-20° C to 60° C (-4° F to 140° F)	
IP rating	IP54 suited for indoor dry and damp locations	
Included accessories	16 ft reels	98 ft reels
Two-Wire Connector Block with Lead	2 (C4-LCB5-2WL)	4
Two-Wire Connector Block	2 (C4-LCB10-2W)	4
Two-Wire Heavy-Duty Connector with Lead	2 (C4-LCH5-2WL)	4
Right Angle Connector	3	3
Small Screwdriver	1	1
Emery Board	1	1

MORE INFO ON VIBRANT



ctrl4.co/vibrant

INSTALLATION GUIDE



ctrl4.co/vibrant-fixed-ig