

# CONTROL4® VIBRANT

## UNIVERSAL SQUARE 45 DEGREE EXTRUSION AND LENS - 5-PACK



### CONTROL4 VIBRANT UNIVERSAL SQUARE 45 DEGREE EXTRUSION AND LENS (5-PACK) 3.2FT (1M)


C4-LEEL5-SQ-U-3F

Use this extrusion and lens to create directional fixtures and to diffuse light. It also works for under-cabinet lighting and surface mount applications.

- Surface mount installation featuring a modern trim finish
- Frosted lens protects the light source while evenly diffusing light
- Lightweight anodized aluminum extrusion provides excellent heat dissipation
- Field cuttable extrusion and lens
- End caps available for a tailored look
- Compatible with 10-12 mm wide tape light (all indoor SKUs)
- Dimensions (H x W): 29/32" (23 mm) by 25/32" (20 mm) with an internal channel width of 19/32" (15.2 mm)

# CONTROL4® UNIVERSAL SQUARE 45-DEGREE EXTRUSION AND LENS

## DIMENSIONS

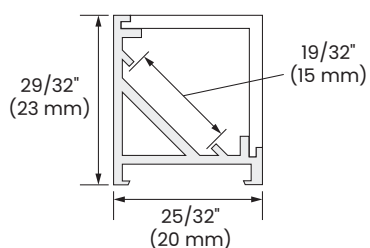

## SPECIFICATIONS

Model number	C4-LEEL5-SQ-U-3F
Extrusion length	3.28' (1 m)
Maximum tape light width	0.59" (15 mm)
Finish	Anodized aluminum
Mounting method	Mounting clip

### Compatible with these models:

C4-LA-WD-16	Accent warm-dimming
C4-LP-WD-16	Performance warm-dimming
C4-LP-F27-16 / 98	Performance fixed color, 2700K
C4-LP-F30-16 / 98	Performance fixed color, 3000K
C4-LP-F40-16 / 98	Performance fixed color, 4000K
C4-LP-FCOB27-16	Performance fixed color diffusing, 2700K
C4-LP-FCOB30-16	Performance fixed color diffusing, 3000K
C4-LP-FCOB40-16	Performance fixed color diffusing, 4000K
C4-LP-FT-16	Performance fully tunable
C4-LP-RGBW-16 / 98	Performance RGBW
C4-LP-RGBTW-16 / 98	Performance RGBTW


### Included accessories

C4-LEL-SQ-U-3F	Diffused lens
	Mounting clips (5)

### Available accessories

C4-LEE-SQ-U-END	1 power feed end cap, 1 end cap
-----------------	---------------------------------

MORE INFO ON VIBRANT LIGHTING



[ctrl4.co/vibrant](http://ctrl4.co/vibrant)

INSTALLATION GUIDE



[ctrl4.co/vibrant-extrusion-ig](http://ctrl4.co/vibrant-extrusion-ig)