

SM-CEILING-TRUSS

1½" NPS Truss Adapter for Ceiling Mounts

Contents

Truss adapter assembly

2 × U-bolts


4 × Hex nuts

4 × Lock washers

4 × Washers

4 × M5×5 set screw


2.5mm hex wrench

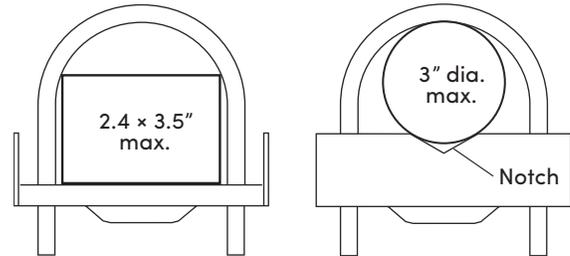

Installation

The adapter plate fits over square and round trusses. Square trusses sit between the two side walls of the plate. Round trusses sit in the adapter plate's notch.

1. Position the U-bolts over the top of the truss.
2. Slide the adapter plate under the truss and onto the U-bolts. Orient the plate as shown in the illustration at top.
3. Attach the plate using the included hex nuts, lock washers and washers as shown to the right.
4. Thread the extension pole (sold separately) into the adapter plate.
5. Insert and tighten the set screw to secure the extension pole.
6. Attach your ceiling mount.

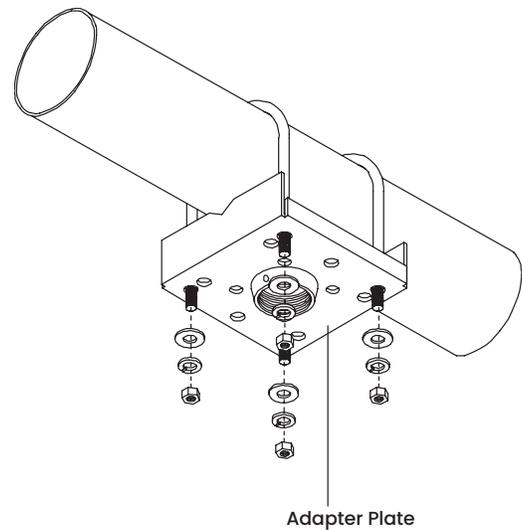

Technical Support

For chat and telephone, visit ctrl4.co/techsupport • Email: TechSupport@SnapOne.com
Visit tech.control4.com/technician for discussions, instructional videos, news, and more.

Warranty and Legal Notices

Find details of the product's Limited Warranty and other resources such as regulatory notices and patent and safety information, at snapone.com/legal or request a paper copy from Customer Service at 866.424.4489.

Copyright ©2024, Snap One, LLC. All rights reserved. Snap One and its respective logos are [registered trademarks](#) or trademarks of Snap One, LLC, in the United States and/or other countries. Control4 and Strong are also registered trademarks or trademarks of Snap One, LLC. Other names and brands may be claimed as the property of their respective owners. Snap One makes no claim that the information contained herein covers all installation scenarios and contingencies, or product use risks. Information within this specification subject to change without notice.

240405-1010

200-01018-B

